

Hydraulische Handzange HP 130 H


mit H-Presskopf, 180° drehbar

- ▶ Doppelkolben-Pumpe für schnelles Anfahren des Presseinsatzes
- ▶ Automatisches Überdruck-Sicherheitsventil
- ▶ Presskraft: 130 kN

Hydraulic hand-operated tool HP 130 H

with H-compression head, rotating 180°

- ▶ Double piston pump for rapid motion of the die-set
- ▶ Automatic safety relief valve to avoid overpressure
- ▶ Force of pressure: 130 kN

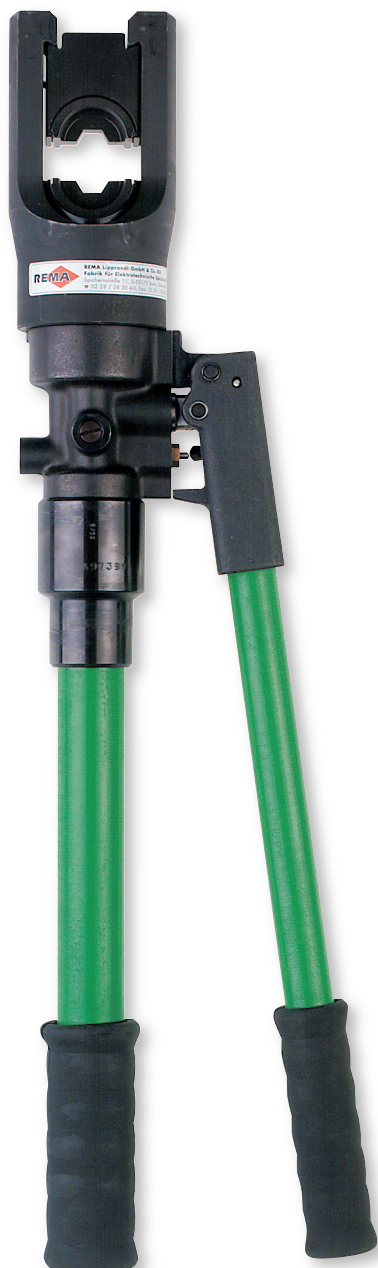

Material material	Pressform compression form	Pressbereich compression range mm ²	Länge length mm	Gewicht weight kg	Kat.-Nr. cat.-no.
Cu	Sechskantpressung, handelsüblich Hexagonal pressing, standard-type	6 - 300	530	5,5	57997 - 00
Cu + Al	Sechskantpressung, DIN Type Hexagonal pressing, DIN type	6 - 300			
Cu	Dornkerbung Deep indent pressing	6 - 240			
Cu	Adenendhülsen Pressung trapezoidal pressing	10 - 185			
Cu + Al	Oval-Pressung oval pressing	10 - 95			
Cu + Al	Vorrunden Prerounding	25 - 240			
Cu	REMA WMS - Pressung REMA WMS - pressing	10 - 95			
Transportkoffer/Transport case			650	4,9	58005 - 00
Presseinsätze ab Seite 141 / Dies on page 141					