



# PREVECTRON® 3 REMOTE TESTING MODULE

| Reference                                                              | P1580<br>Remote Testing Module T (no counter)                                                                                      | P1585<br>Remote Testing Module TC (with counter)                               |
|------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Specifications                                                         |                                                                                                                                    |                                                                                |
| Adaptability                                                           | Plug & Play module for all 5 Prevectron®3 models Factory pairing based on the Prevectron®3 unit Serial Number                      |                                                                                |
| On-site testing capabilities                                           | Remote testing Module réf.P1591 (not included) :<br>-ESE Lightning conductor condition<br>-Solar Remote Testing Unit battery level |                                                                                |
| Remote Testing Module / ESE Lightning Conductor Communication Protocol | Radio-frequency communication HF 2.4GhZ<br>Range = 100m/330 ft                                                                     |                                                                                |
| Power Supply                                                           | High Performance Li-Fe-Po4 Battery<br>3 200mA.h - 3,2V                                                                             |                                                                                |
| Battery Charge                                                         | Monocrystalline Glass-coated Solar panel                                                                                           |                                                                                |
| Counter (option - ref P1543TC)                                         |                                                                                                                                    | Integrated Lightning Flash Counter<br>Patented contactless counting technology |
| Remote Testing Module central rod                                      | Full electrical continuity<br>315 mm² section – Nickel plated Copper                                                               |                                                                                |
| Remote Testing Module / Prevectron connection                          | Fast Connect Technology Plug-in system                                                                                             |                                                                                |
| Maintenance                                                            | Battery Replacement Kit réf. P1599                                                                                                 |                                                                                |
| Warranty (excluding battery)                                           | 5 years                                                                                                                            |                                                                                |
| Packing                                                                |                                                                                                                                    |                                                                                |
| Dimensions                                                             | 470 x 250 x 165 mm                                                                                                                 |                                                                                |
| Gross Weight                                                           | 2.900 kg                                                                                                                           | 3.000 kg                                                                       |
| Certifications - Standards                                             |                                                                                                                                    |                                                                                |
| Qualifoudre                                                            | Ineris certificate N° N°051166662001                                                                                               |                                                                                |
| ISO 9001 : 2015                                                        | Bureau Veritas certificate                                                                                                         |                                                                                |
| Lightning Flash Counter                                                | EN 62561-6 Standards                                                                                                               |                                                                                |
| Eco Label                                                              | AFAQ N°1335.2 11/2014 Certificate                                                                                                  |                                                                                |

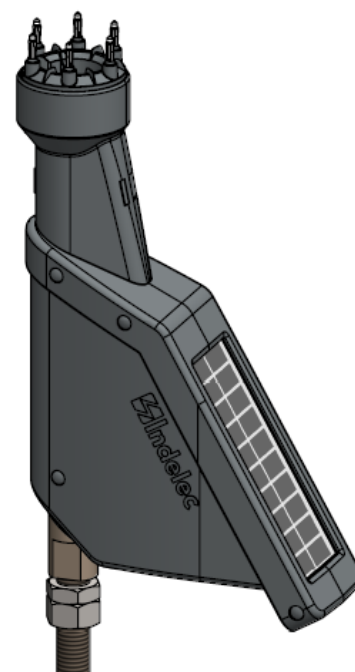

Dimensions (mm)

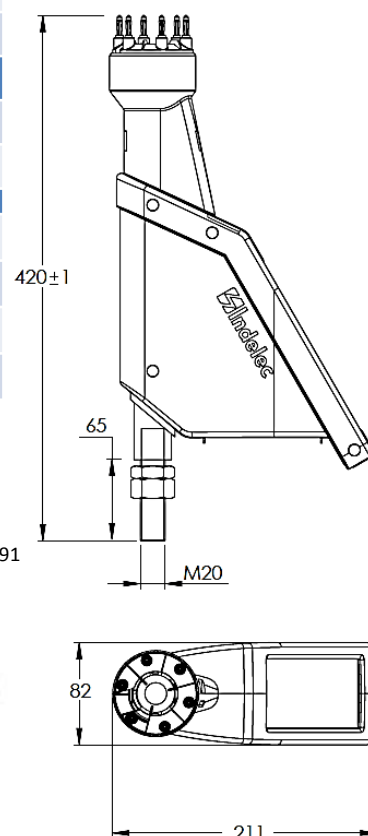

PREVECTRON 3®  
(not included)

Remote Testing  
Module

Testing Remote Control ref P1591  
(not included)

Installation Guide ref. C3839

©INDELEC SA – 61 Chemin des postes F59500 DOUAI - Tel +33 327 944 944  
www.indelec.com



Non contractual document - INDELEC reserves the right to modify its product design, dimensions, weight as well as the illustrations without prior notice.